


# Drawer and cabinet specifications

|                          |           |
|--------------------------|-----------|
| Maximum drawer thickness | 16 (5/8") |
| Lengths available        | 18" - 21" |
| Static load capacity     | 100 lb    |

## Drawer box specifications


Front view

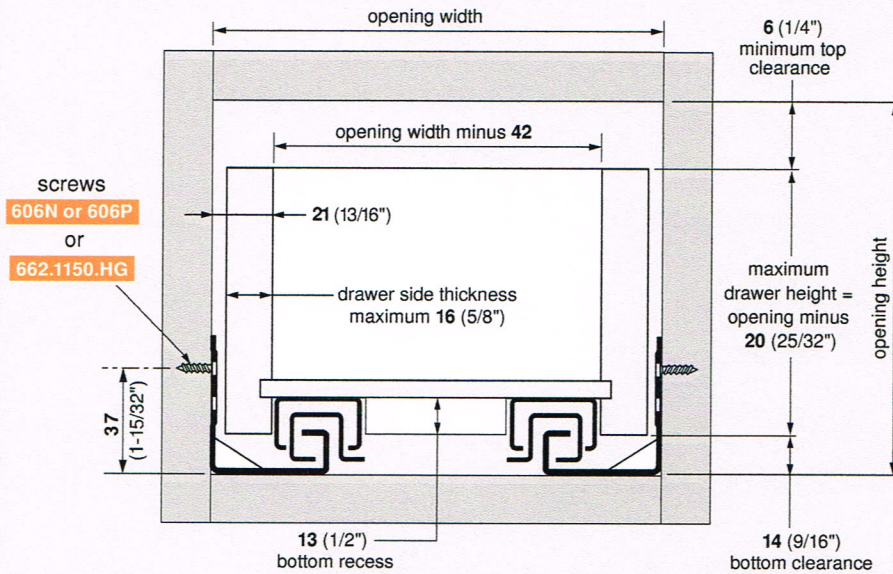

**NOTE:** Material thickness may vary. Inside drawer width **must** equal opening width minus 42 for TANDEM to align and function properly.


## Drawer back preparation

Rear view



## Runner comparison


Side view

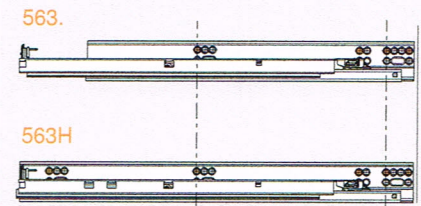


**NOTE:** Same hole pattern as the 563H

## Runner mounting specifications

Side view

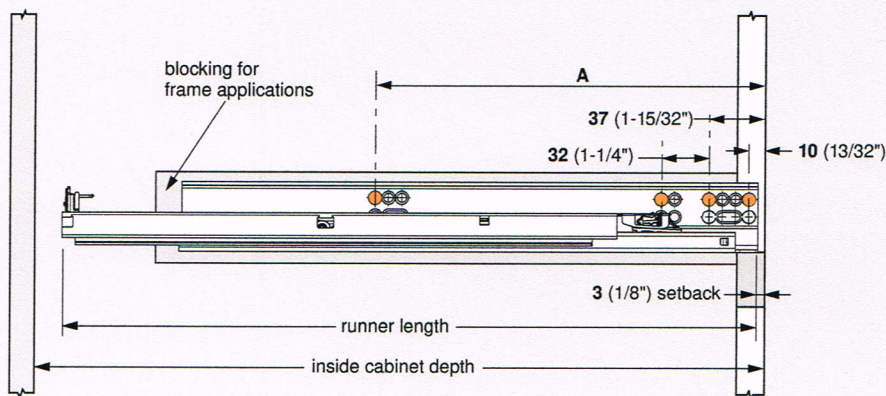

Runner close-up

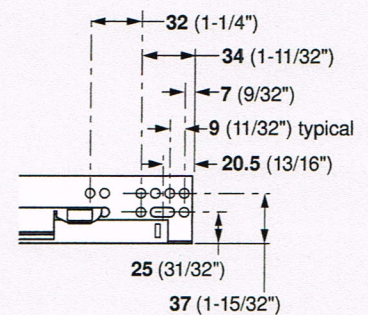

**NOTE:** Elongated holes are for ±4.5 (3/16") depth adjustment only. Additional screws must be used to secure the runner to the cabinet.

**NOTE:** The orange dots indicate fixing screw locations required to meet specified load ratings

| TANDEM plus<br>BLUMOTION | drawer length | minimum inside<br>cabinet depth | runner length   | screw location |
|--------------------------|---------------|---------------------------------|-----------------|----------------|
|                          |               |                                 |                 | A              |
| 563.5330B                | 533 (21")     | 557 (21-15/16")                 | 548 (21-9/16")  | 261 (10-9/32") |
| 563.4570B                | 457 (18")     | 480 (18-29/32")                 | 471 (18-17/32") | 261 (10-9/32") |